


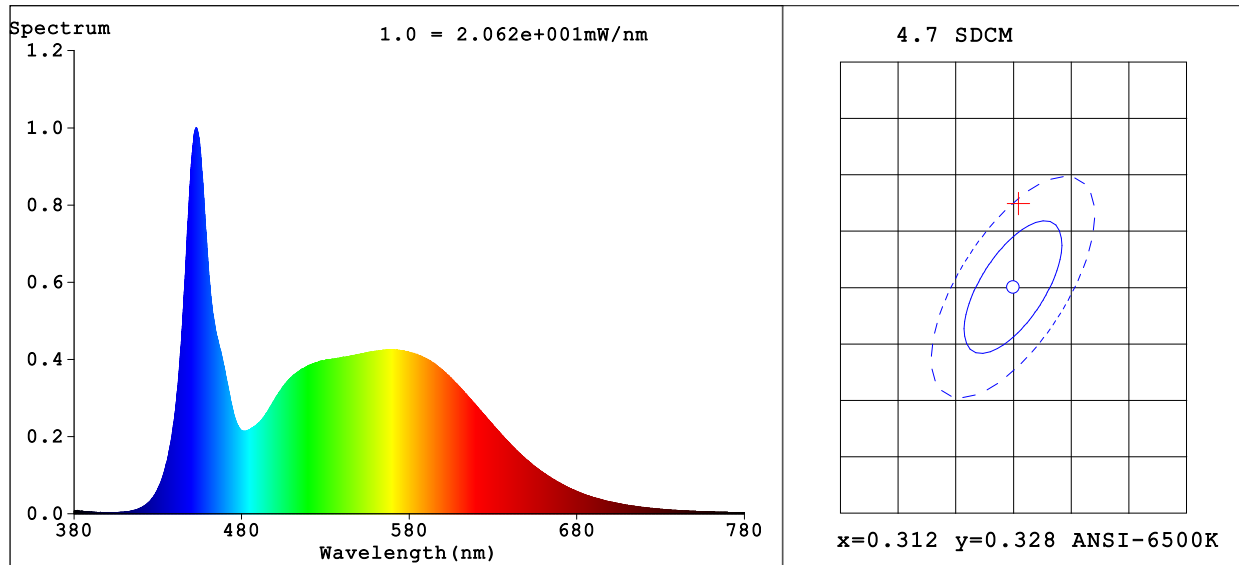

### Colorimetric Parameters

Chromaticity Coordinate:x=0.3128 y=0.3356/u'=0.1954 v'=0.4718

CCT=6455K(Duv=0.0065) Dominant WL:Ld =493.1nm Purity=6.8%

Peak WL:Lp=452.8nm FWHM=18.7nm

Render Index:Ra=80.9

R1 =78 R2 =88 R3 =93 R4 =78 R5 =79 R6 =83 R7 =86

R8 =63 R9 =0 R10=71 R11=77 R12=53 R13=81 R14=97 R15=72

### Photometric & Radiometric Parameters

Flux=562.6 lm Eff.:221.98 lm/W Fe=1.765 W

### Electrical parameters

V=21.10 V I=0.1201 A P=2.534 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI\_6500K

Status: Integral T = 160 ms Ip = 53331 (81%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:  
Test By:DAMIN  
Temperature:25.3Deg  
Manufacturer:HXY  
Assessor:damin

Number:1  
Date:2024-12-25 15:42:50  
Humidity:65.0%  
Remarks:  
DeviceSN:HUL-280SA-024024

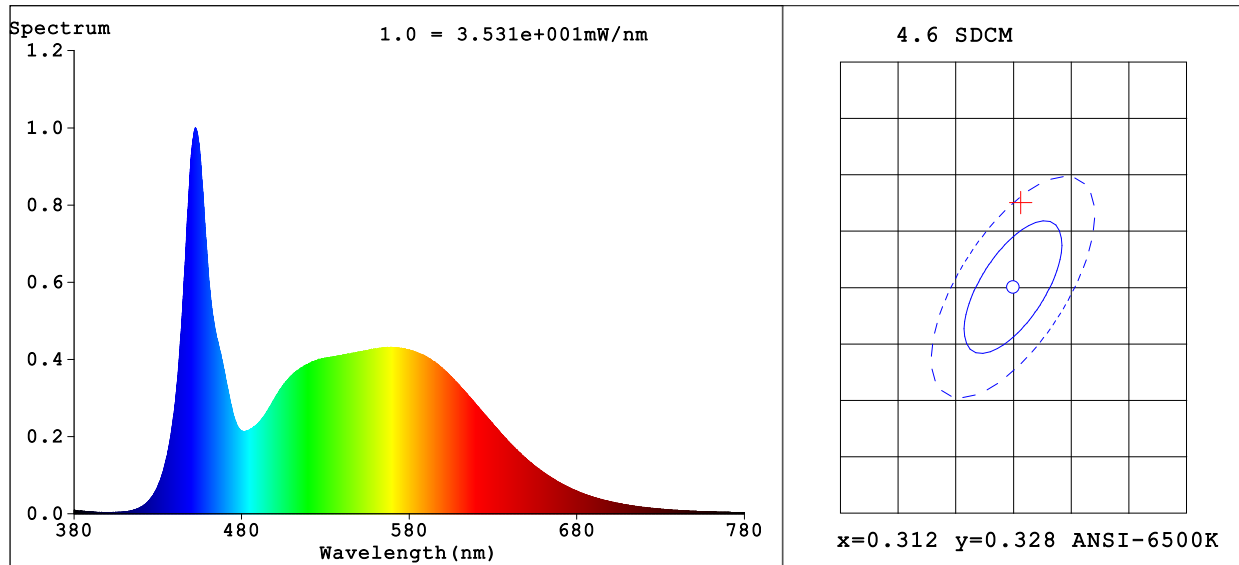

### Colorimetric Parameters

Chromaticity Coordinate:x=0.3130 y=0.3357/u'=0.1955 v'=0.4719

CCT=6444K(Duv=0.0065) Dominant WL:Ld =493.2nm Purity=6.7%

Peak WL:Lp=452.4nm FWHM=19.1nm

Render Index:Ra=80.7

|        |        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R1 =78 | R2 =87 | R3 =93 | R4 =78 | R5 =79 | R6 =82 | R7 =86 |        |
| R8 =63 | R9 =0  | R10=70 | R11=77 | R12=53 | R13=81 | R14=96 | R15=71 |

### Photometric & Radiometric Parameters

Flux=975.0 lm Eff.:215.28 lm/W Fe=3.057 W

### Electrical parameters

V=21.58 V I=0.2099 A P=4.529 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI\_6500K

Status: Integral T = 80 ms Ip = 45361 (69%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:  
Test By:DAMIN  
Temperature:25.3Deg  
Manufacturer:HXY  
Assessor:damin

Number:2  
Date:2024-12-25 15:43:45  
Humidity:65.0%  
Remarks:  
DeviceSN:HUL-280SA-024024

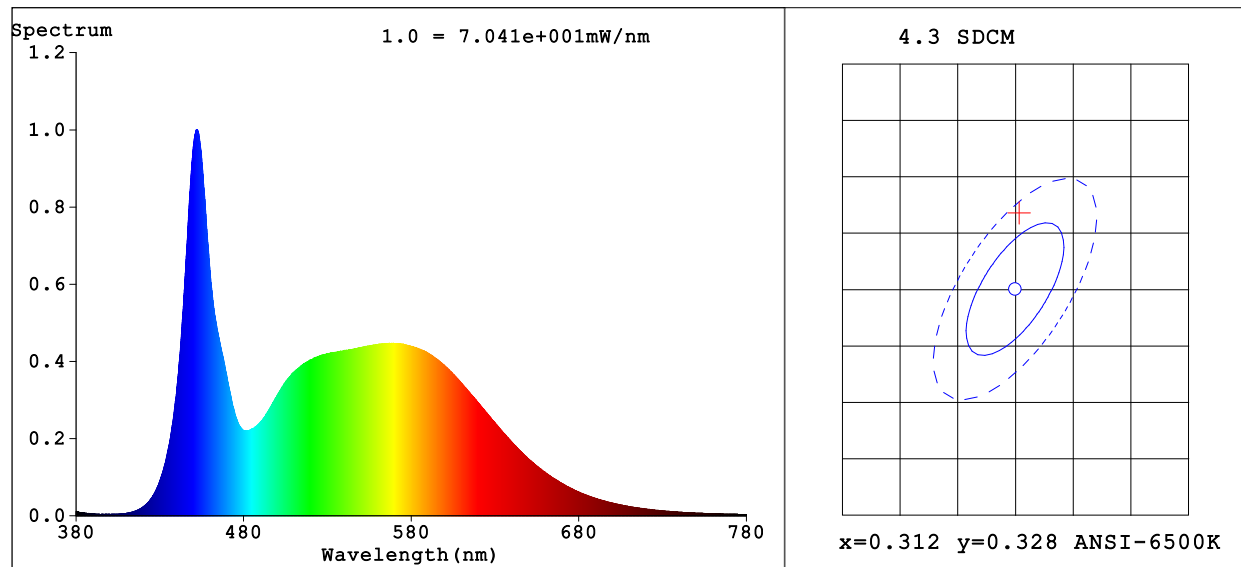

### Colorimetric Parameters

Chromaticity Coordinate:x=0.3126 y=0.3350/u'=0.1956 v'=0.4715

CCT=6466K(Duv=0.0063) Dominant WL:Ld =492.7nm Purity=6.9%

Peak WL:Lp=452.1nm FWHM=20.2nm

Render Index:Ra=80.7

R1 =78 R2 =87 R3 =92 R4 =79 R5 =79 R6 =82 R7 =86

R8 =64 R9 =0 R10=69 R11=78 R12=54 R13=80 R14=96 R15=71

### Photometric & Radiometric Parameters

Flux=2017 lm Eff.:197.96 lm/W Fe=6.337 W

### Electrical parameters

V=22.64 V I=0.4499 A P=10.19 W PF=1.000 F=0.00 Hz

LEVEL:OUT WHITE:ANSI\_6500K

Status: Integral T = 51 ms Ip = 57492 (88%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:  
Test By:DAMIN  
Temperature:25.3Deg  
Manufacturer:HXY  
Assessor:damin

Number:3  
Date:2024-12-25 15:44:34  
Humidity:65.0%  
Remarks:  
DeviceSN:HUL-280SA-024024