


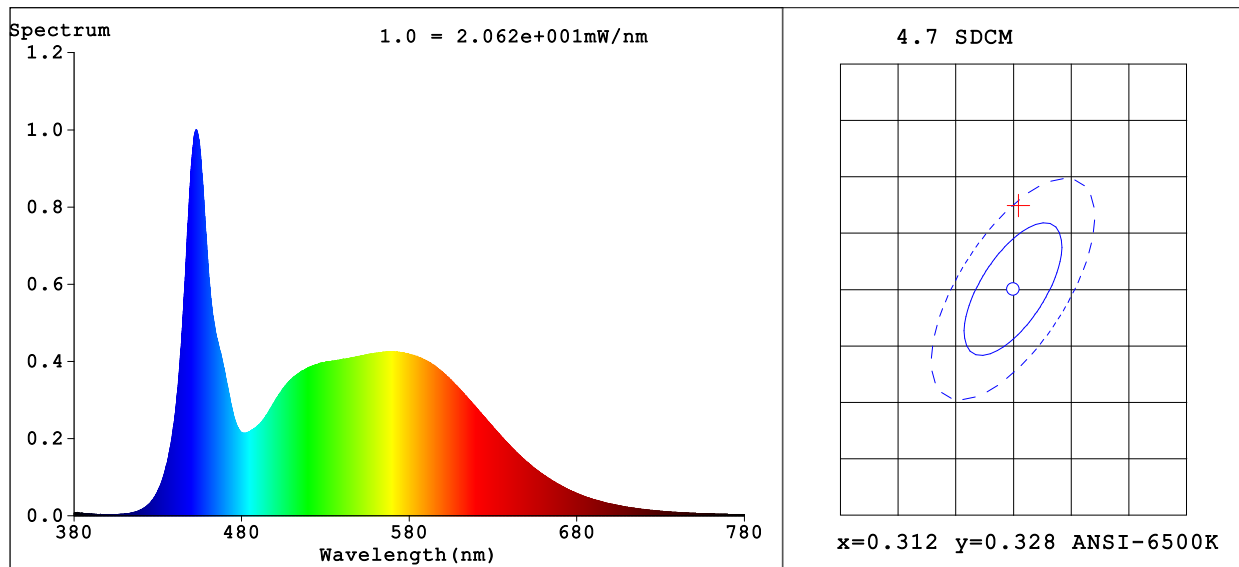

Colorimetric Parameters

Chromaticity Coordinate:x=0.3128 y=0.3356/u'=0.1954 v'=0.4718

CCT=6455K(Duv=0.0065) Dominant WL:Ld =493.1nm Purity=6.8%

Peak WL:Lp=452.8nm FWHM=18.7nm

Render Index:Ra=80.8

R1 =78	R2 =88	R3 =92	R4 =78	R5 =80	R6 =83	R7 =85	
R8 =62	R9 =0	R10=71	R11=77	R12=53	R13=81	R14=97	R15=72

Photometric & Radiometric Parameters

Flux=1693 lm Eff.:221.97 lm/W Fe=1.765 W

Electrical parameters

V=47.67 V I=0.1600 A P=7.627 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_6500K

Status: Integral T = 160 ms Ip = 53331 (81%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:1
Date:2024-12-25
Humidity:65.0%
Remarks:
Device ID:HUL-560SA-054072

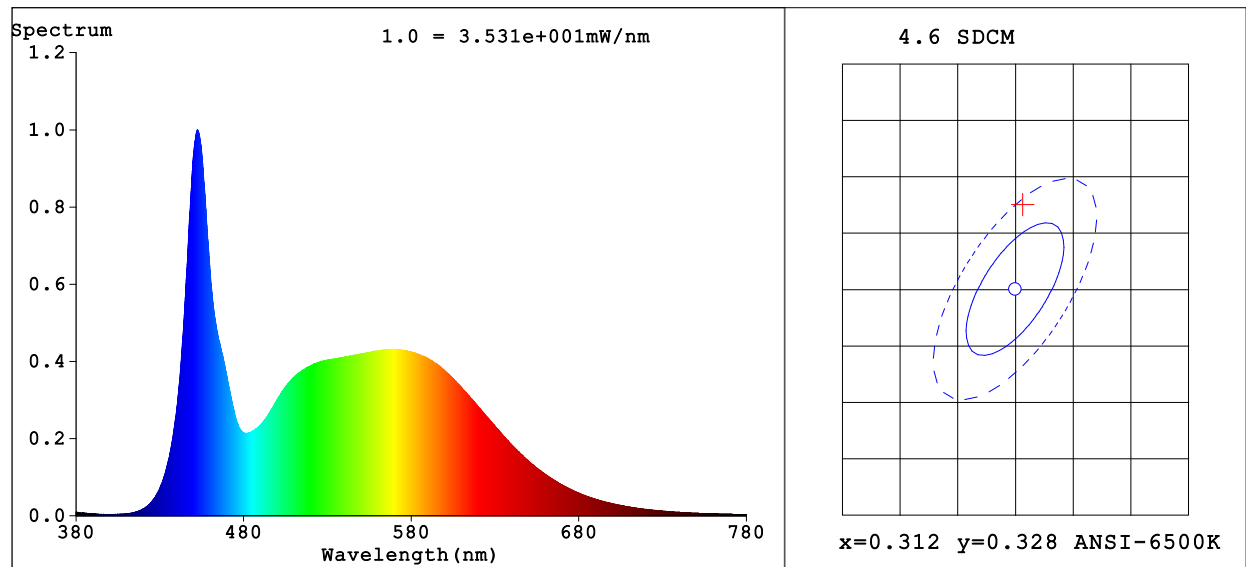

Colorimetric Parameters

Chromaticity Coordinate:x=0.3130 y=0.3357/u'=0.1955 v'=0.4719

CCT=6444K(Duv=0.0065) Dominant WL:Ld =493.2nm Purity=6.7%

Peak WL:Lp=452.4nm FWHM=19.1nm

Render Index:Ra=80.7

R1 =78 R2 =87 R3 =93 R4 =78 R5 =79 R6 =82 R7 =86
R8 =63 R9 =0 R10=70 R11=77 R12=53 R13=81 R14=96 R15=71

Photometric & Radiometric Parameters

Flux=2938 lm Eff.:215.71 lm/W Fe=3.057 W

Electrical parameters

V=48.63 V I=0.2800 A P=13.62 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_6500K

Status: Integral T = 80 ms Ip = 45361 (69%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:2
Date:2024-12-25
Humidity:65.0%
Remarks:
DeviceSN:HUL-560SA-054072

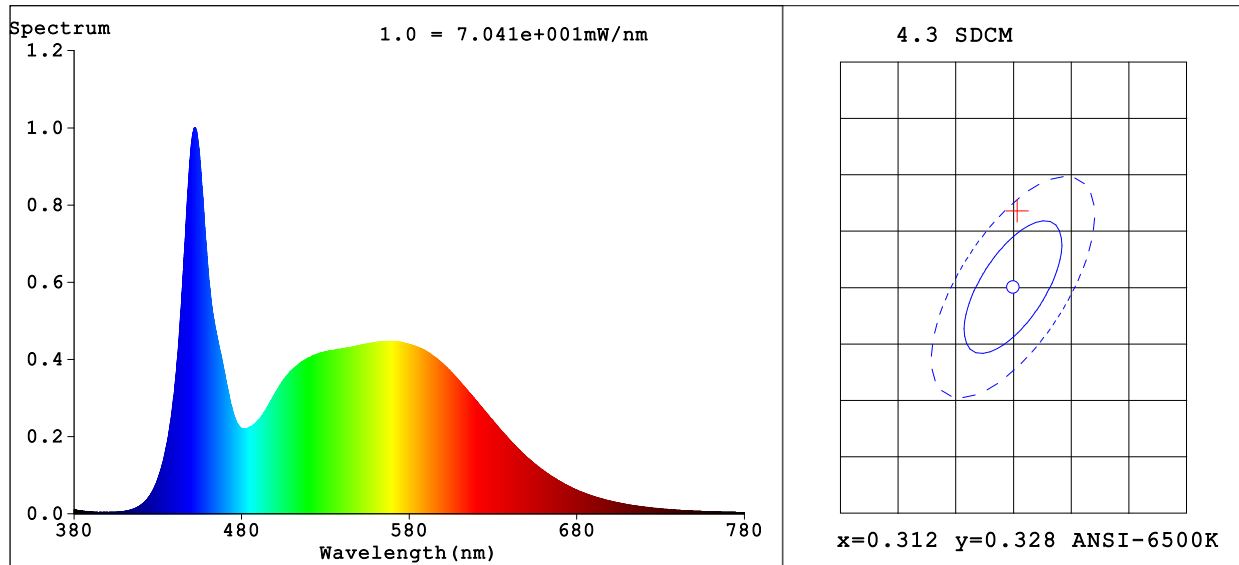

Colorimetric Parameters

Chromaticity Coordinate: x=0.3126 y=0.3350/u'=0.1956 v'=0.4715

CCT=6466K (Duv=0.0063) Dominant WL:Ld =492.7nm Purity=6.9%

Peak WL:Lp=452.1nm FWHM=20.2nm

Render Index: Ra=80.5

R1 =77	R2 =87	R3 =91	R4 =79	R5 =78	R6 =82	R7 =85	
R8 =64	R9 =0	R10=69	R11=78	R12=54	R13=80	R14=96	R15=71

Photometric & Radiometric Parameters

Flux=6042 lm Eff.:198.36 lm/W Fe=6.337 W

Electrical parameters

V=50.77 V I=0.6000 A P=30.46 W PF=1.000 F=0.00 Hz

LEVEL:OUT WHITE:ANSI_6500K

Status: Integral T = 51 ms Ip = 57492 (88%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:3
Date:2024-12-25 15:44:34
Humidity:65.0%
Remarks:
Device ID:HUL-280SA-024024