


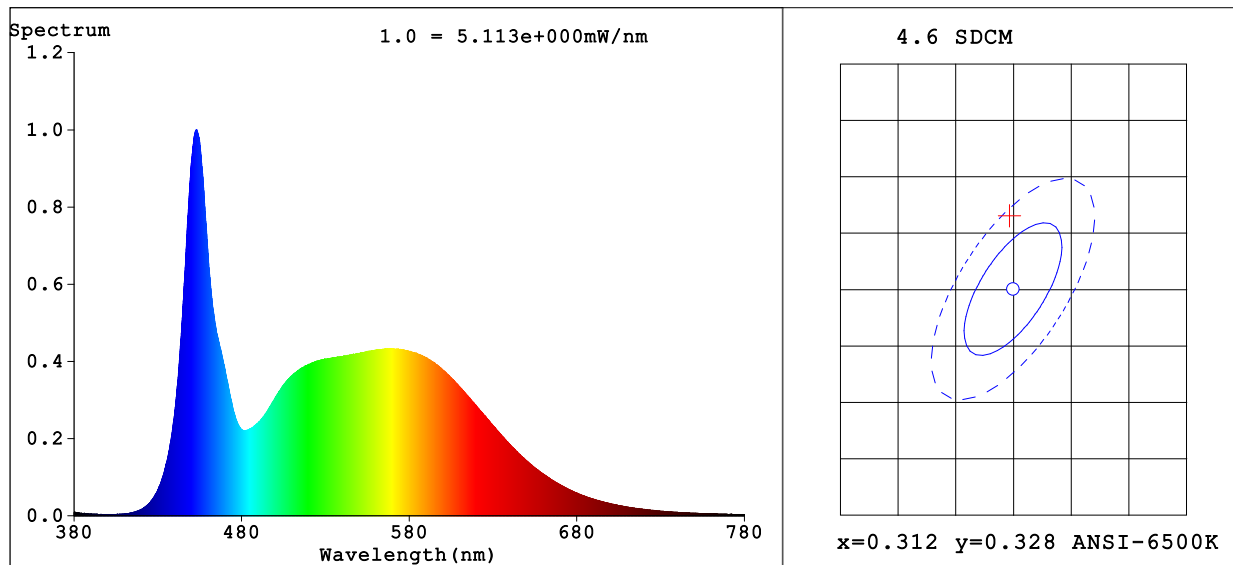

Colorimetric Parameters

Chromaticity Coordinate:x=0.3120 y=0.3347/u'=0.1952 v'=0.4712

CCT=6500K(Duv=0.0065) Dominant WL:Ld =0.0nm Purity=1.6%

Peak WL:Lp=453.2nm FWHM=19.7nm

Render Index:Ra=81.0

R1 =78 R2 =88 R3 =93 R4 =78 R5 =79 R6 =83 R7 =86

R8 =63 R9 =0 R10=71 R11=77 R12=53 R13=81 R14=97 R15=72

Photometric & Radiometric Parameters

Flux=1129 lm Eff.:222.24 lm/W Fe=447.3 mW

Electrical parameters

V=63.50 V I=0.0800 A P=5.080 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_6500K

Status: Integral T = 643 ms Ip = 53210 (81%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:1
Date:2024-12-25
Humidity:65.0%
Remarks:
DeviceSN:HUL-560SA-072048

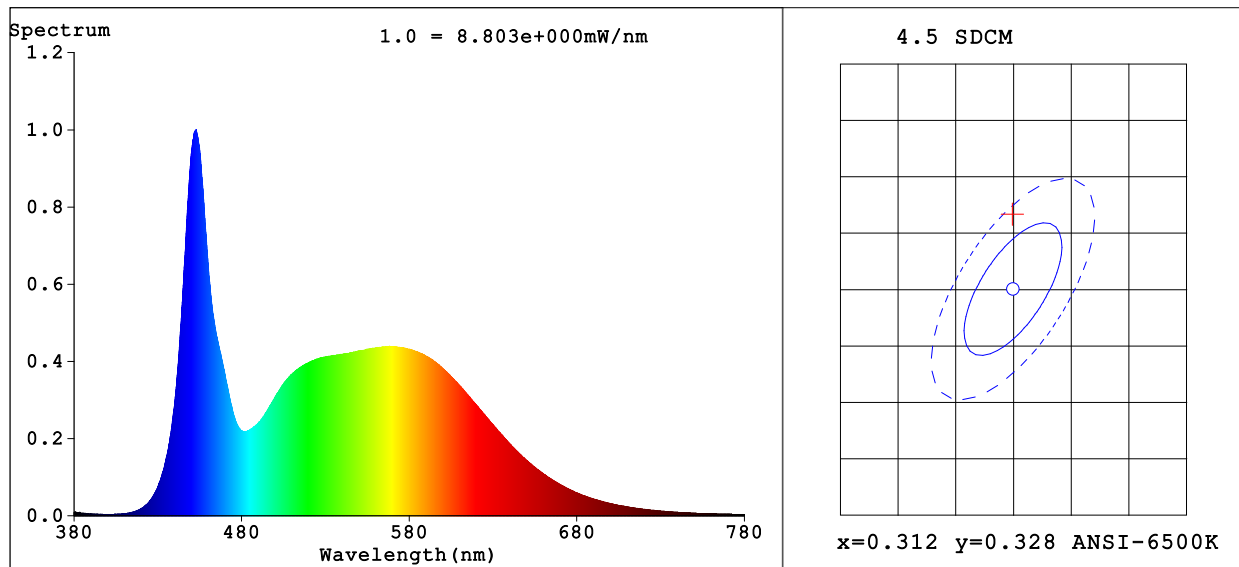

Colorimetric Parameters

Chromaticity Coordinate:x=0.3122 y=0.3349/u'=0.1953 v'=0.4714

CCT=6486K(Duv=0.0064) Dominant WL:Ld =0.0nm Purity=1.6%

Peak WL:Lp=452.8nm FWHM=19.9nm

Render Index:Ra=80.8

R1 =78 R2 =87 R3 =93 R4 =78 R5 =79 R6 =82 R7 =86

R8 =63 R9 =0 R10=70 R11=77 R12=53 R13=81 R14=96 R15=71

Photometric & Radiometric Parameters

Flux=1960 lm Eff.:215.72 lm/W Fe=777.4 mW

Electrical parameters

V=64.90 V I=0.1400 A P=9.086 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_6500K

Status: Integral T = 321 ms Ip = 45455 (69%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:2
Date:2024-12-25
Humidity:65.0%
Remarks:
DeviceSN:HUL-560SA-072048

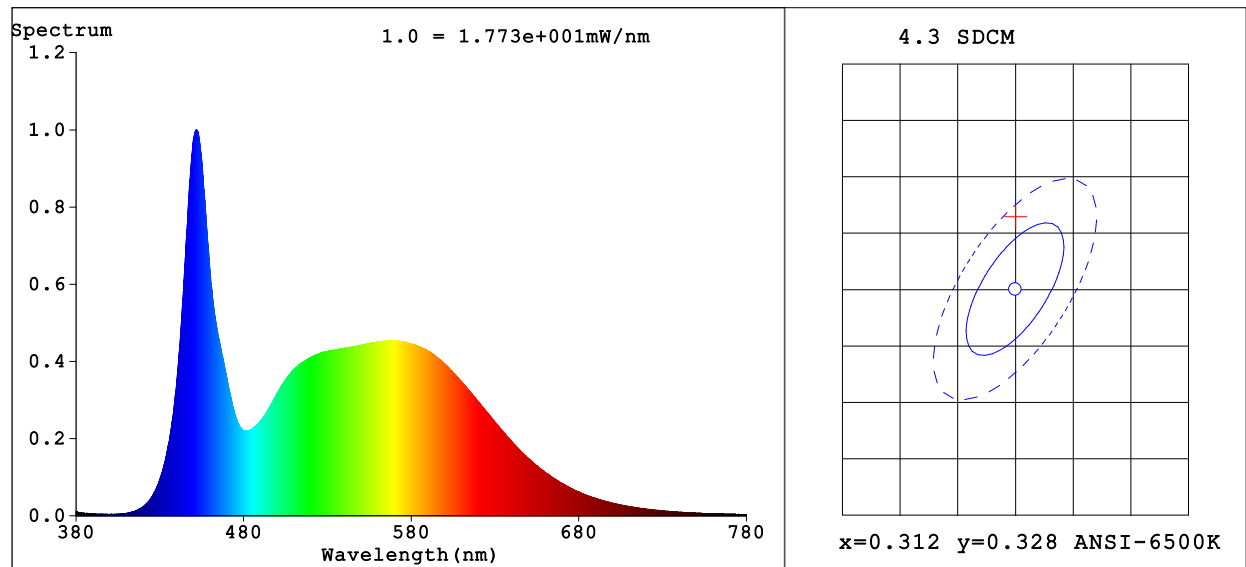

Colorimetric Parameters

Chromaticity Coordinate:x=0.3123 y=0.3346/u'=0.1955 v'=0.4713

CCT=6484K(Duv=0.0062) Dominant WL:Ld =0.0nm Purity=1.5%

Peak WL:Lp=451.7nm FWHM=20.6nm

Render Index:Ra=80.5

R1 =77 R2 =87 R3 =92 R4 =79 R5 =79 R6 =81 R7 =86
R8 =64 R9 =0 R10=68 R11=78 R12=54 R13=80 R14=96 R15=71

Photometric & Radiometric Parameters

Flux=4001 lm Eff.:197.68 lm/W Fe=1.617 W

Electrical parameters

V=67.48 V I=0.3000 A P=20.24 W PF=1.000 F=0.00 Hz

LEVEL:OUT WHITE:ANSI_6500K

Status: Integral T = 160 ms Ip = 45373 (69%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:3
Date:2024-12-25
Humidity:65.0%
Remarks:
DeviceSN:HUL-560SA-072048