



A 200lm/w
Ultra high efficiency soft light strip module (24V)

HUS-008SA-024128

LED Module Datasheet

The HIGNTEK HUS-008SA-024128 product is the 2835 series of soft light strips used in ultra-high light efficiency decorative lighting. The product is divided into 12V and 24V, and uses a high light efficiency UHE-2835 led chip to make the module with ultra-high efficiency and brightness. The product adopts flexible PCB, which can be bent appropriately, and the product is equipped with a scissible position, which can be cut arbitrarily without affecting the use of other parts.

FEATURES AND BENEFITS

Efficacy and luminous flux of up to 200lm/W typical and 1600lm available

Available CCT/CRI options: 2700K-6500K(80 & 90 CRI)

Designed to be compatible with standard third party optics

FPCB for high flexibility and excellent electrical performance

CE, ROHS, ERP compliance

5-year limited guarantee

PRIMARY APPLICATIONS

Strip Light

Wall lamp

Decorative lighting



Performance Characteristics

Product Selection Guide

Table 1. Product performance of HIGNTEK HUS-008SA-024128 (IF=334mA/M, T_p=25°C)

NOMINAL CCT	CRI [RA]	CURRENT [mA/M]	FORWARD VOLTAGE [V]	POWER [W/M]	LUMINOUS FLUX [lm/M]		EFFICACY [lm/W/M]	
					T _c = 25° C	T _c = 45° C	T _c = 25° C	T _c = 45° C
2700K	80	334	24	8	1472	1443	184	180
3000K	80	334	24	8	1488	1458	186	182
3500K	80	334	24	8	1488	1458	186	182
4000K	80	334	24	8	1600	1568	200	196
5000K	80	334	24	8	1600	1568	200	196
5700K	80	334	24	8	1600	1568	200	196
6500K	80	334	24	8	1584	1552	198	194
2700K	90	334	24	8	1295	1269	162	159
3000K	90	334	24	8	1309	1283	164	160
3500K	90	334	24	8	1309	1283	164	160
4000K	90	334	24	8	1408	1380	176	173
5000K	90	334	24	8	1408	1380	176	173
5700K	90	334	24	8	1408	1380	176	173
6500K	90	334	24	8	1394	1366	174	171

Notes for Table1:

1. T_c: temperature at which performance is specified measured at "T_c point".
2. HIGNTEK maintains a measurement tolerance of : Luminous flux: ±7 %, CRI: ±3.0.
3. Measurement tolerance of CCT is ±5%.
4. HUS-008SA-024128 Color temperature (2700K-6500K) is optional.

Product Code Information

Table 2. Product Code-HUS-008SA-024128-XXX

CRI [RA]	NOMINAL CCT	PRODUCT CODE
80	2700K	HUS-008SA-024128-278
	3000K	HUS-008SA-024128-308
	3500K	HUS-008SA-024128-358
	4000K	HUS-008SA-024128-408
	5000K	HUS-008SA-024128-508
	5700K	HUS-008SA-024128-578
	6500K	HUS-008SA-024128-658
90	2700K	HUS-008SA-024128-279
	3000K	HUS-008SA-024128-309
	3500K	HUS-008SA-024128-359
	4000K	HUS-008SA-024128-409
	5000K	HUS-008SA-024128-509
	5700K	HUS-008SA-024128-579
	6500K	HUS-008SA-024128-659

Electrical Characteristics

Table 3. Electrical characteristics for HIGNTEK HUS-008SA-024128

PARAMETER	SYMBOL	VALUE			UNIT	REMARK
		MIN.	TYP.	MAX.		
Operating Current	I_F	-	334	-	mA/M	-
Operating Voltage	V_F	-	24.0	-	Vdc	$I_F = 334 \text{ mA/M}$ $T_F = 25 \text{ }^\circ\text{C}$
Power Consumption	P	-	8.0	-	W/M	

Notes for Table3:

1. T_F : temperature at which performance is specified measured at "Tc point".
2. HIGNTEK maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

Absolute Maximum Ratings

Table 4. Maximum Operating Specification ($T_p=25^{\circ}\text{C}$)


PART NUMBER	PARAMETER	SYMBOL	UNIT	RATING
HUS-008SA-024128-XXX	Power Consumption	P	W/M	64
	DC Forward Current	I_F	mA/M	1200
	Operating Temperature	-	$^{\circ}\text{C}$	-40 to 65
	Storage Temperature	T_{Ctg}	$^{\circ}\text{C}$	-40 to 105
	ESD Sensitivity	-	KV	3
	Beam Angle	$\angle$	$^{\circ}$	120
	IP Grade	-	-	IP20
	Maximum Reverse Voltage	V_{RRM}	V	Module are not designed to be driven in reverse bias

Notes for Table4:

1. T_p : temperature at which performance is specified measured at " T_c point".

Temperature Characteristics (DC24V)

$T_c [^{\circ}\text{C}]$	Flux [%]	Efficacy [%]
85	94	93
65	97	96
45	100	100
25	102	103
0	105	107

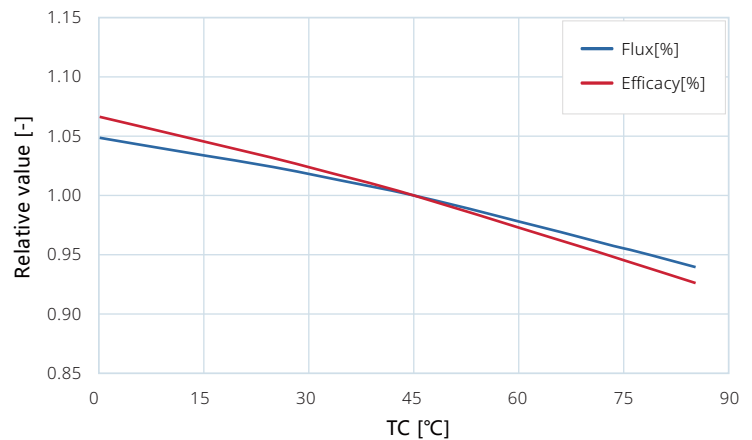Figure 1. Typical normalized Flux and Efficacy vs. T_c temperature for HIGNTEK HUS-008SA-024128 at DC24V.

Mechanical Dimensions


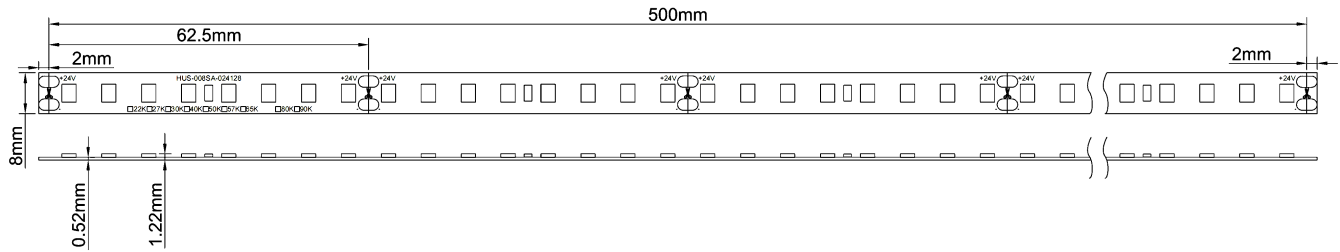


Figure 2. Mechanical Dimensions for HIGNTEK HUS-008SA-024128.



Each disk cascades 5 meters

Figure 3. Packaging Information for HIGNTEK HUS-008SA-024128.

Notes for Figure 3:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

Table 5. Bill of Materials for HIGNTEK HUS-008SA-024128.

COMPONENT	SPECIFICATION PARAMETERS	QUANTITY
LED:2835	UHE-2835 3V	128PCS/M
PCB: FPCB	500*8mm	2PCS/M
SMD Resistance	R:120Ω	32PCS/M

Notes for Table5:

1. Resistance specifications are adjusted according to different power.

Optional Branding (LED)



About HengXinYuan

Hengxinyuan is a professional lighting solutions company that helps customers deliver differentiated solutions to gain and maintain a competitive edge. The company's broad product portfolio includes a wide array of package and device choices such as CREE led, SAMSUNG led, LUMILEDS led, UHE led, Indoor lighting module and Outdoor lighting module. Hengxinyuan's LED products pursue high efficiency, high quality, and high reliability, and aim to meet the needs of customers to the greatest extent. With the supply of high-standard supply chain services as the driving force, they contribute to the development of global LED green and healthy lighting power.

