


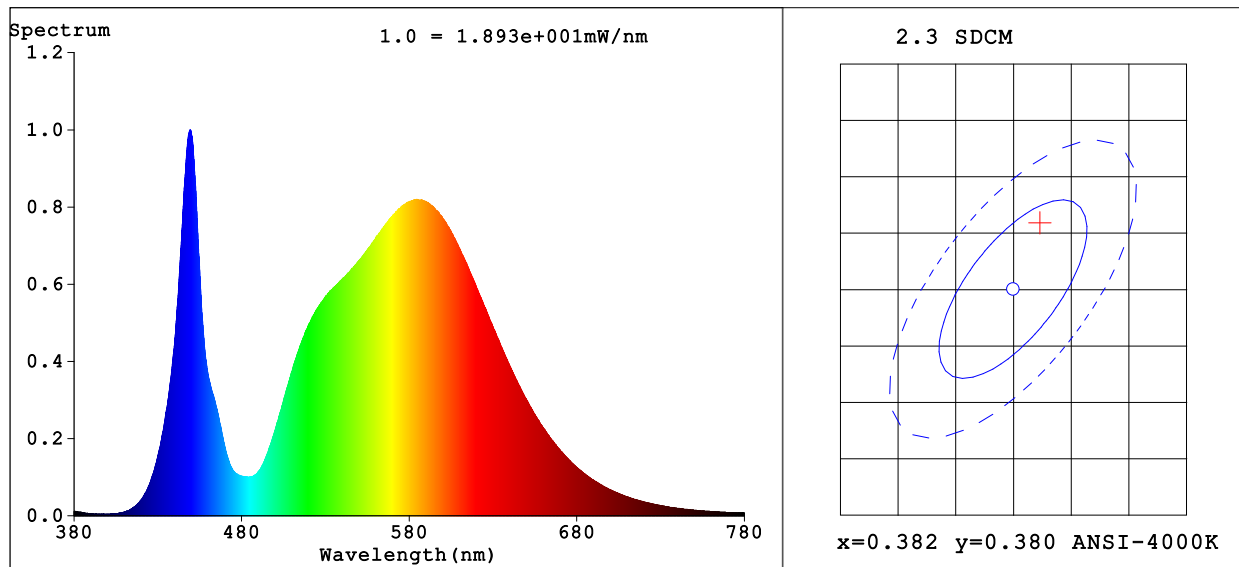

Colorimetric Parameters

Chromaticity Coordinate: x=0.3841 y=0.3856/u'=0.2240 v'=0.5060

CCT=3967K (Duv=0.0030) Dominant WL:Ld =577.7nm Purity=31.0%

Peak WL:Lp=449.3nm FWHM=15.8nm

Render Index: Ra=71.0

R1 =67 R2 =78 R3 =87 R4 =70 R5 =67 R6 =69 R7 =80

R8 =49 R9 =0 R10=49 R11=66 R12=39 R13=69 R14=93 R15=60

Photometric & Radiometric Parameters

Flux=848.0 lm Eff.:216.05 lm/W Fe=2.373 W

Electrical parameters

V=10.90 V I=0.3601 A P=3.925 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 96 ms Ip = 51699 (79%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:1
Date:2025-02-28 15:18:02
Humidity:65.0%
Remarks:
Device:HUO-070SA-012004 10.9V 360MA

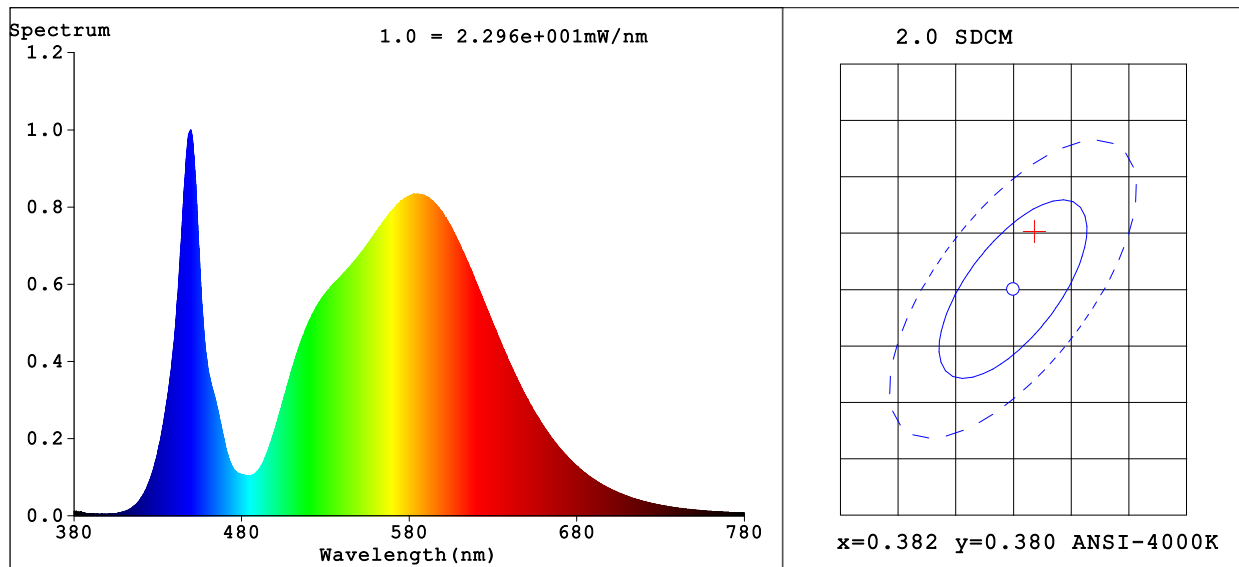

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3837$ $y=0.3848$ $u'=0.2240$ $v'=0.5056$

CCT=3974K (Duv=0.0028) Dominant WL:Ld =577.8nm Purity=30.6%

Peak WL:Lp=449.7nm FWHM=16.5nm

Render Index:Ra=71.0

R1 =67 R2 =78 R3 =87 R4 =70 R5 =67 R6 =69 R7 =80

R8 =49 R9 =0 R10=49 R11=66 R12=40 R13=69 R14=93 R15=60

Photometric & Radiometric Parameters

Flux=1047 lm Eff.:214.24 lm/W Fe=2.937 W

Electrical parameters

V=10.96 V I=0.4459 A P=4.887 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 76 ms Ip = 50605 (77%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:2
Date:2025-02-28 15:22:04
Humidity:65.0%
Remarks:
Device:HUO-070SA-012004 10.96V 445MA

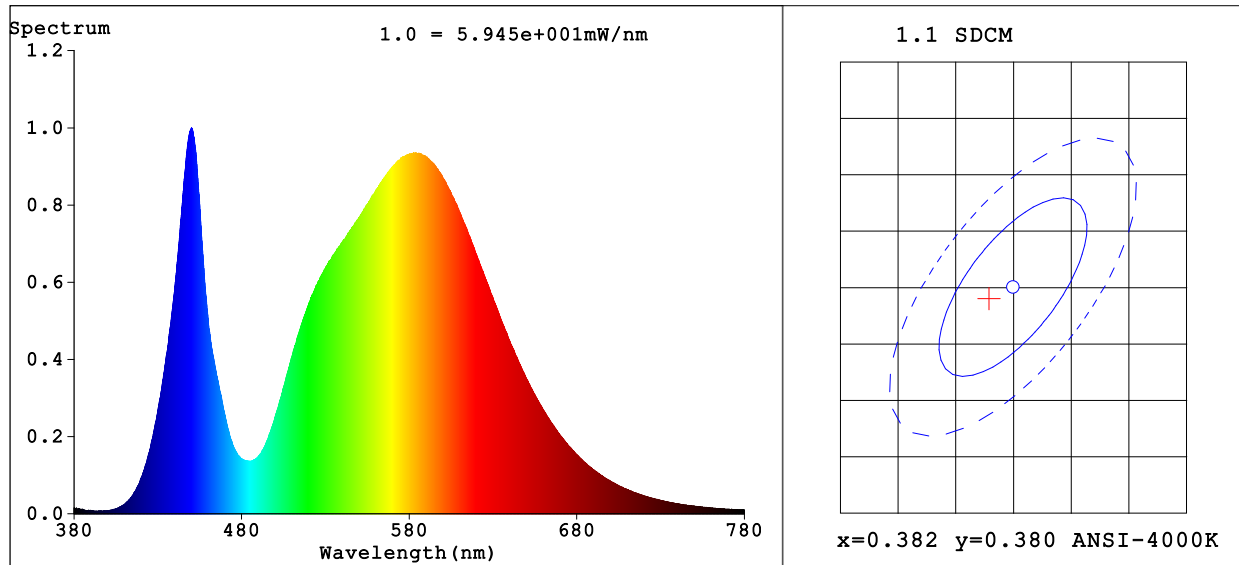

Colorimetric Parameters

Chromaticity Coordinate: x=0.3797 y=0.3787/u'=0.2238 v'=0.5023

CCT=4035K (Duv=0.0011) Dominant WL:Ld =578.3nm Purity=27.6%

Peak WL:Lp=450.1nm FWHM=22.2nm

Render Index: Ra=71.2

R1 =68	R2 =78	R3 =87	R4 =69	R5 =67	R6 =69	R7 =80	
R8 =50	R9 =0	R10=49	R11=64	R12=42	R13=69	R14=93	R15=61

Photometric & Radiometric Parameters

Flux=3045 lm Eff.:170.30 lm/W Fe=8.708 W

Electrical parameters

V=11.95 V I=1.496 A P=17.88 W PF=1.000 F=0.00 Hz

LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 24 ms Ip = 46396 (71%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:3
Date:2025-02-28 15:24:10
Humidity:65.0%
Remarks:
Device:HUO-070SA-012004 11.95V 1.496A