


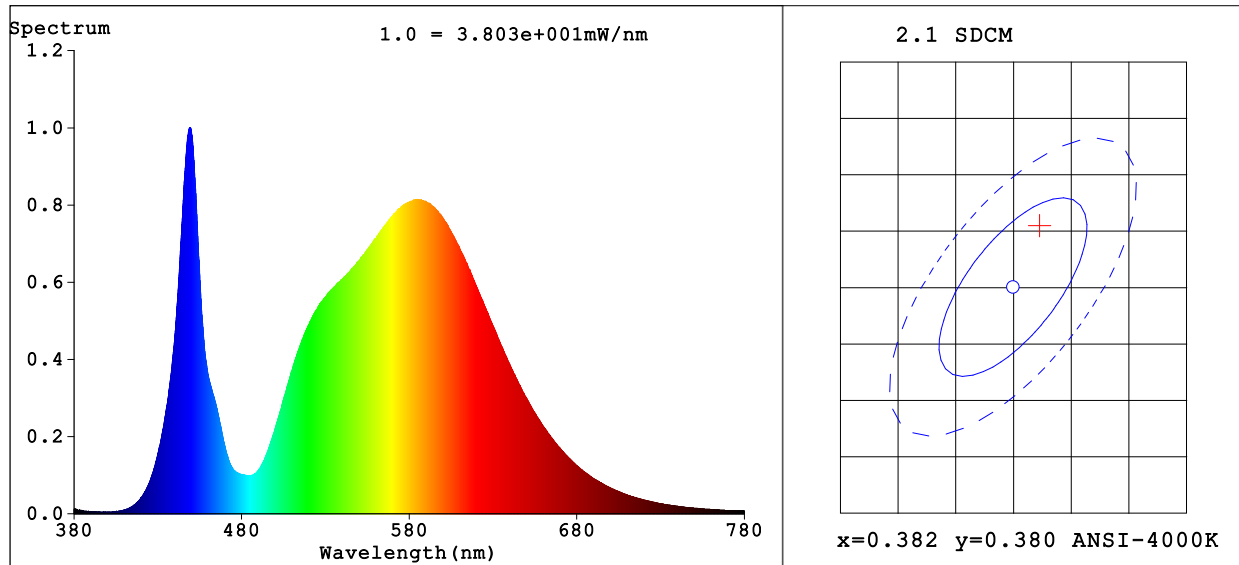

Colorimetric Parameters

Chromaticity Coordinate: x=0.3841 y=0.3852/u'=0.2242 v'=0.5058

CCT=3964K (Duv=0.0028) Dominant WL:Ld =577.8nm Purity=30.9%

Peak WL:Lp=449.3nm FWHM=15.7nm

Render Index: Ra=71.0

R1 =67 R2 =78 R3 =87 R4 =70 R5 =67 R6 =69 R7 =80

R8 =49 R9 =0 R10=49 R11=66 R12=40 R13=69 R14=93 R15=60

Photometric & Radiometric Parameters

Flux=1692 lm Eff.:217.87 lm/W Fe=4.738 W

Electrical parameters

V=21.76 V I=0.3569 A P=7.766 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 49 ms Ip = 52639 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:4
Date:2025-02-28 15:30:20
Humidity:65.0%
Remarks:
Device:HUO-121SA-024008 21.76V 356MA

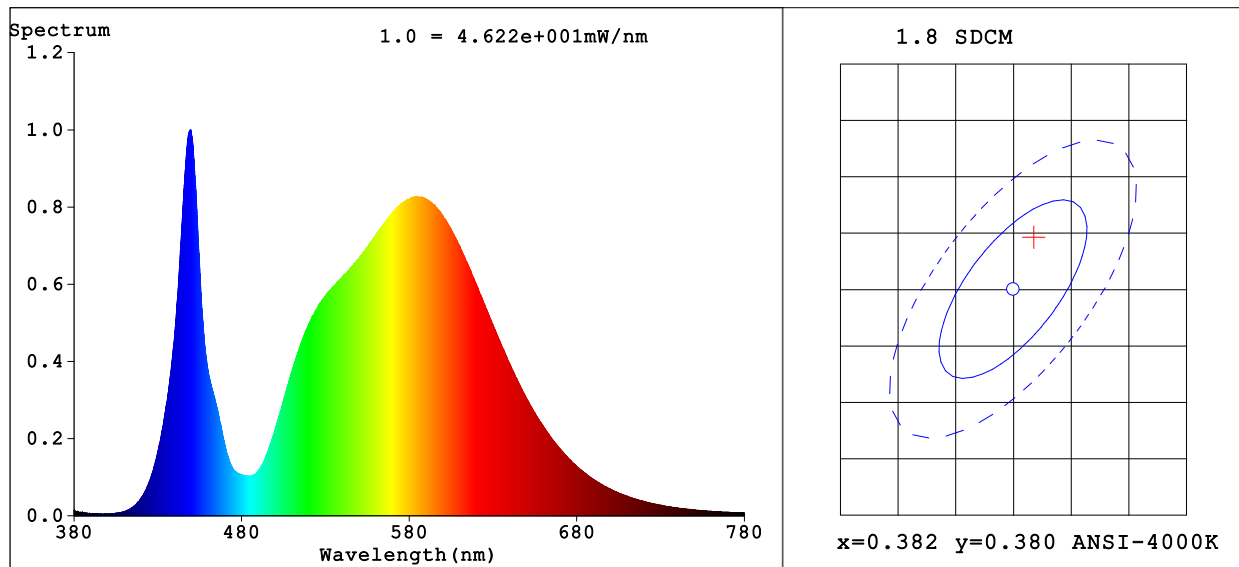

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3836$ $y=0.3843$ $u'=0.2242$ $v'=0.5053$

CCT=3972K (Duv=0.0026) Dominant WL:Ld =577.9nm Purity=30.5%

Peak WL:Lp=449.7nm FWHM=16.3nm

Render Index:Ra=71.0

R1 =67 R2 =78 R3 =87 R4 =70 R5 =67 R6 =69 R7 =80

R8 =49 R9 =0 R10=49 R11=66 R12=40 R13=69 R14=93 R15=60

Photometric & Radiometric Parameters

Flux=2088 lm Eff.:214.44 lm/W Fe=5.861 W

Electrical parameters

V=21.89 V I=0.4448 A P=9.737 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 39 ms Ip = 51774 (79%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:5
Date:2025-02-28 15:32:38
Humidity:65.0%
Remarks:
Device:HUO-121SA-024008 21.89V 445MA

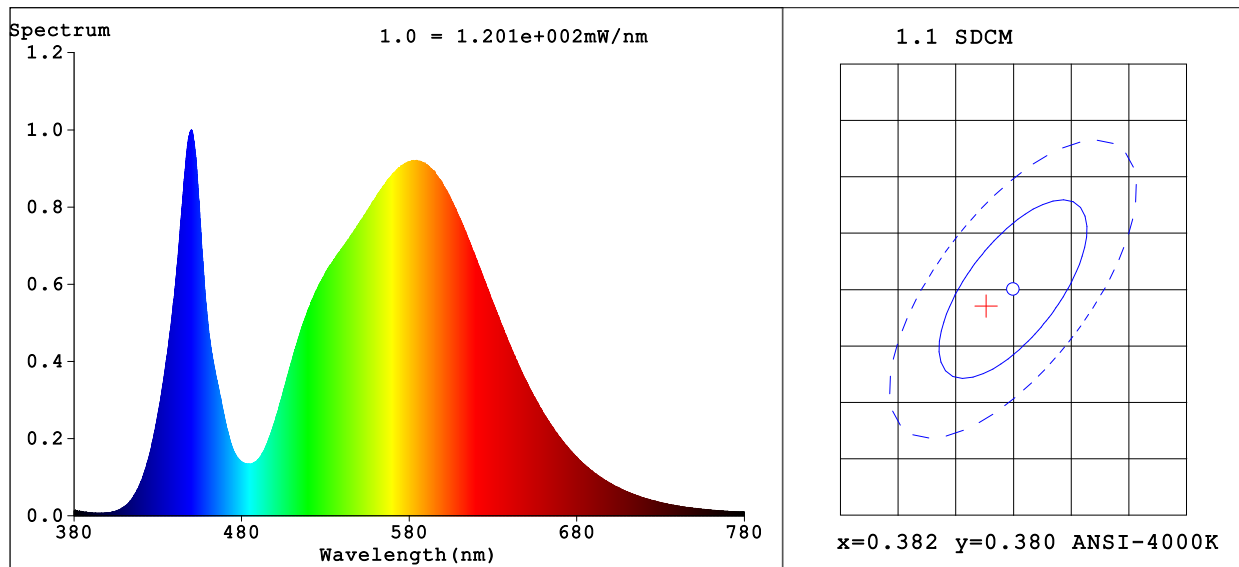

Colorimetric Parameters

Chromaticity Coordinate: x=0.3795 y=0.3782/u'=0.2239 v'=0.5021

CCT=4038K (Duv=0.0010) Dominant WL:Ld =578.4nm Purity=27.4%

Peak WL:Lp=450.1nm FWHM=21.8nm

Render Index: Ra=71.3

R1 =68 R2 =79 R3 =87 R4 =70 R5 =68 R6 =69 R7 =80

R8 =50 R9 =0 R10=49 R11=65 R12=42 R13=70 R14=92 R15=61

Photometric & Radiometric Parameters

Flux=6067 lm Eff.:169.71 lm/W Fe=17.37 W

Electrical parameters

V=23.93 V I=1.494 A P=35.75 W PF=1.000 F=0.00 Hz

LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 15 ms Ip = 57707 (88%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:6
Date:2025-02-28 15:34:22
Humidity:65.0%
Remarks:
Device:HUO-121SA-024008 23.93V 1.494A