


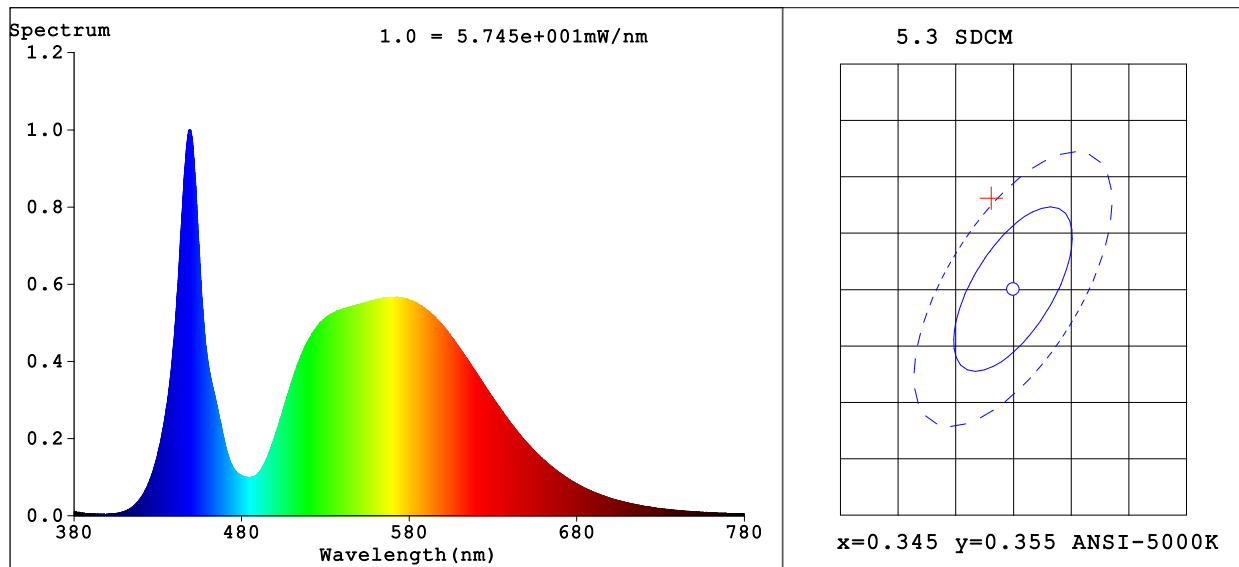

Colorimetric Parameters

Chromaticity Coordinate: x=0.3428 y=0.3634/u'=0.2054 v'=0.4900

CCT=5122K (Duv=0.0067) Dominant WL:Ld =565.6nm Purity=11.9%

Peak WL:Lp=448.9nm FWHM=17.1nm

Render Index: Ra=71.3

R1 =68 R2 =76 R3 =82 R4 =72 R5 =69 R6 =68 R7 =81

R8 =54 R9 =0 R10=43 R11=69 R12=40 R13=69 R14=90 R15=61

Photometric & Radiometric Parameters

Flux=1965 lm Eff.:208.53 lm/W Fe=5.698 W

Electrical parameters

V=22.22 V I=0.4241 A P=9.423 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_5000K

Status: Integral T = 46 ms Ip = 52003 (79%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:7
Date:2025-02-28 15:47:02
Humidity:65.0%
Remarks:
Device:HUO-121SA-024016 22.22V 424MA

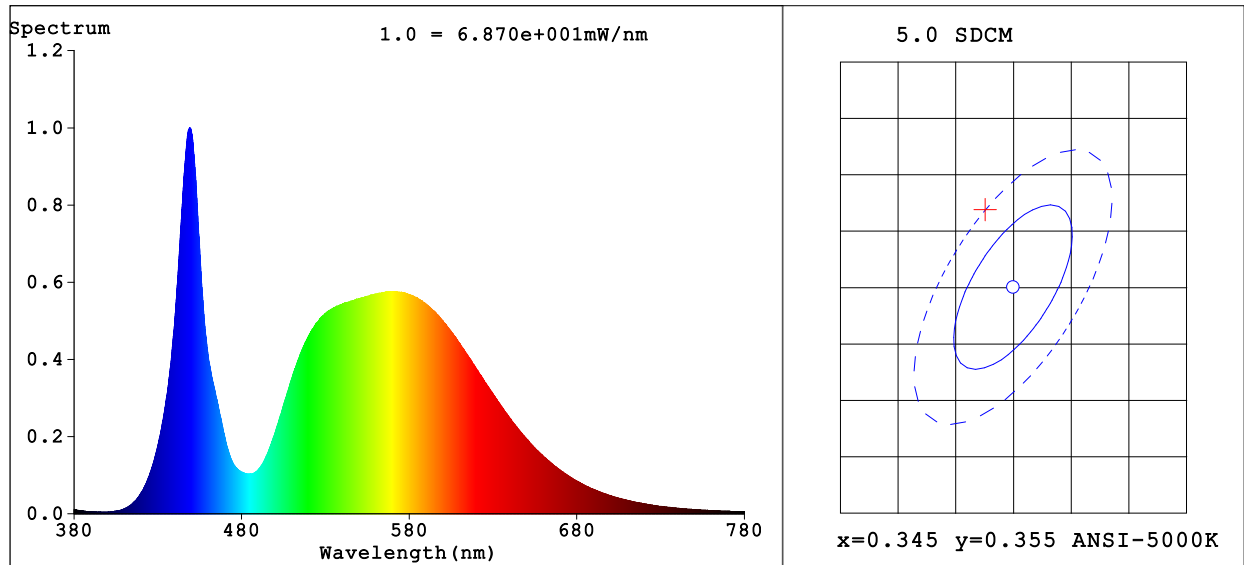

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3423$ $y=0.3622$ $u'=0.2055$ $v'=0.4893$

CCT=5137K (Duv=0.0064) Dominant WL:Ld =565.4nm Purity=11.4%

Peak WL:Lp=449.0nm FWHM=17.7nm

Render Index:Ra=71.3

R1 =68	R2 =76	R3 =82	R4 =72	R5 =69	R6 =68	R7 =81
R8 =55	R9 =0	R10=43	R11=69	R12=41	R13=69	R14=90 R15=61

Photometric & Radiometric Parameters

Flux=2385 lm Eff.:203.32 lm/W Fe=6.942 W

Electrical parameters

V=22.39 V I=0.5239 A P=11.73 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_5000K

Status: Integral T = 36 ms Ip = 49430 (75%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:8
Date:2025-02-28 15:48:06
Humidity:65.0%
Remarks:
Device:HUO-121SA-024016 22.39V 524MA

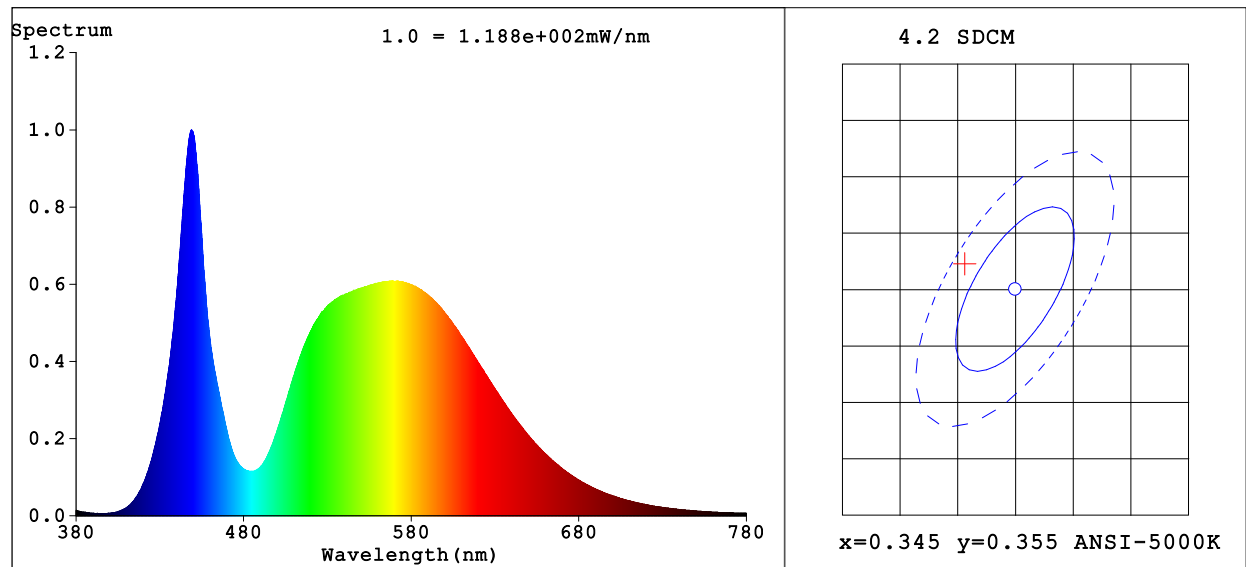

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3403$ $y=0.3576$ $u'=0.2059$ $v'=0.4868$

CCT=5198K (Duv=0.0049) Dominant WL:Ld =564.8nm Purity=9.4%

Peak WL:Lp=448.9nm FWHM=20.4nm

Render Index:Ra=71.7

R1 =69	R2 =76	R3 =82	R4 =73	R5 =70	R6 =68	R7 =81
R8 =56	R9 =0	R10=43	R11=70	R12=43	R13=70	R14=90 R15=62

Photometric & Radiometric Parameters

Flux=4348 lm Eff.:175.68 lm/W Fe=12.84 W

Electrical parameters

V=23.64 V I=1.047 A P=24.75 W PF=1.000 F=0.00 Hz

LEVEL:OUT WHITE:ANSI_5000K

Status: Integral T = 23 ms Ip = 57650 (88%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:9
Date:2025-02-28 15:51:40
Humidity:65.0%
Remarks:
Device:HUO-121SA-024016 23.64V 772MA