


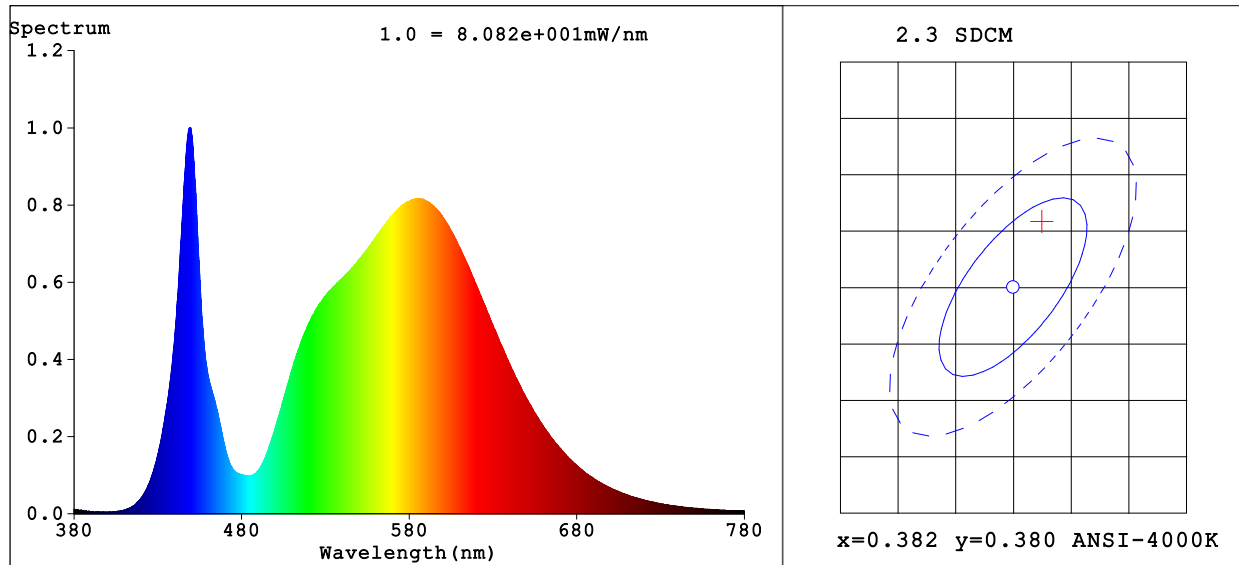

Colorimetric Parameters

Chromaticity Coordinate: x=0.3843 y=0.3855/u'=0.2242 v'=0.5060

CCT=3962K (Duv=0.0030) Dominant WL:Ld =577.8nm Purity=31.0%

Peak WL:Lp=448.9nm FWHM=15.7nm

Render Index: Ra=71.0

R1 =67 R2 =78 R3 =87 R4 =70 R5 =67 R6 =69 R7 =80

R8 =49 R9 =0 R10=49 R11=66 R12=39 R13=69 R14=93 R15=60

Photometric & Radiometric Parameters

Flux=3606 lm Eff.:218.02 lm/W Fe=10.09 W

Electrical parameters

V=43.52 V I=0.3800 A P=16.54 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 23 ms Ip = 52673 (80%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:13
Date:2025-02-28 16:16:53
Humidity:65.0%
Remarks:
Device:HUO-223SA-048016 43.5V 380MA

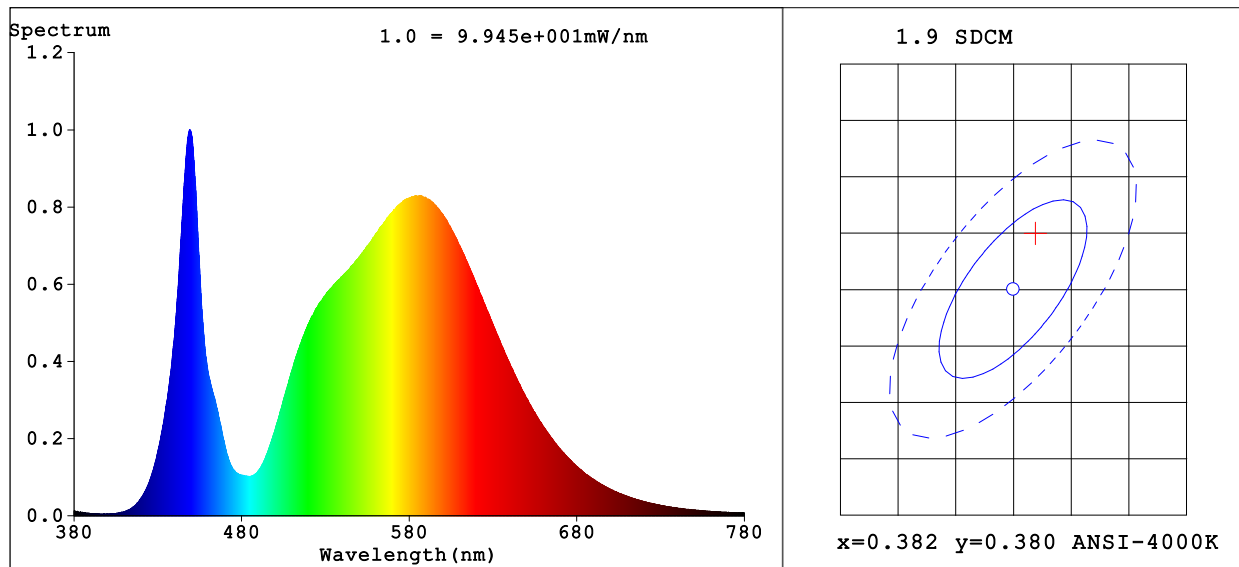

Colorimetric Parameters

Chromaticity Coordinate: x=0.3837 y=0.3847/u'=0.2241 v'=0.5055

CCT=3970K (Duv=0.0027) Dominant WL:Ld =577.8nm Purity=30.6%

Peak WL:Lp=449.0nm FWHM=16.3nm

Render Index: Ra=71.0

R1 =67 R2 =78 R3 =87 R4 =70 R5 =67 R6 =69 R7 =80

R8 =49 R9 =0 R10=49 R11=66 R12=40 R13=69 R14=93 R15=60

Photometric & Radiometric Parameters

Flux=4508 lm Eff.:213.85 lm/W Fe=12.65 W

Electrical parameters

V=43.91 V I=0.4801 A P=21.08 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 18 ms Ip = 51596 (79%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:14
Date:2025-02-28 16:19:54
Humidity:65.0%
Remarks:
Device:HUO-223SA-048016 43.9V 480MA

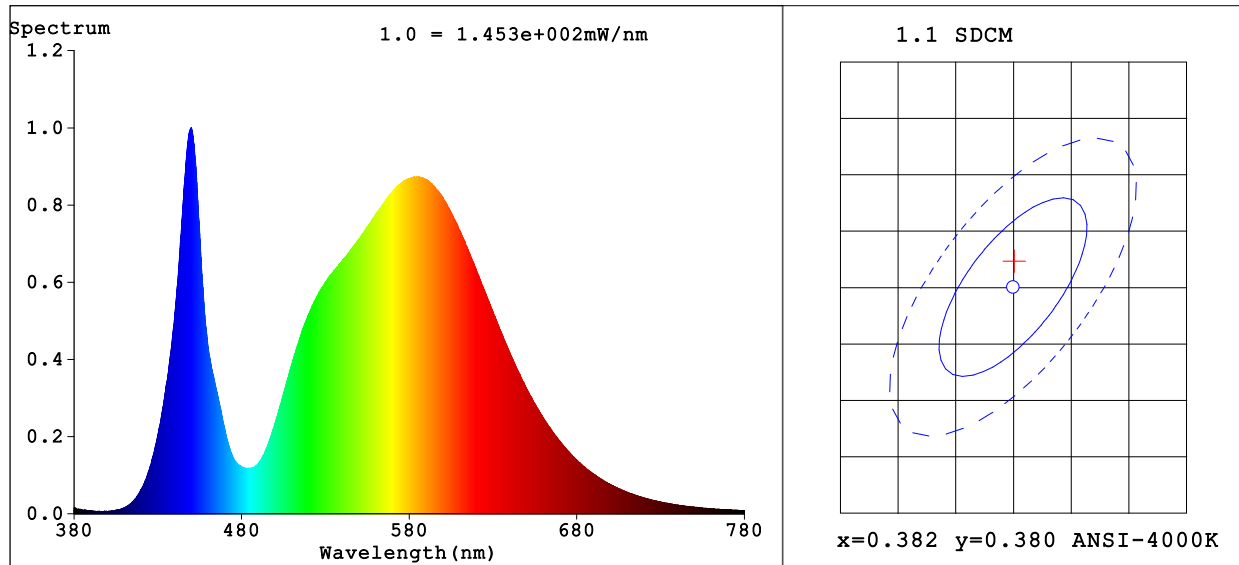

Colorimetric Parameters

Chromaticity Coordinate: x=0.3819 y=0.3820/u'=0.2240 v'=0.5041

CCT=4000K (Duv=0.0020) Dominant WL:Ld =578.0nm Purity=29.2%

Peak WL:Lp=450.1nm FWHM=18.6nm

Render Index: Ra=71.1

R1 =67 R2 =78 R3 =87 R4 =70 R5 =67 R6 =69 R7 =80

R8 =49 R9 =0 R10=49 R11=65 R12=41 R13=69 R14=93 R15=61

Photometric & Radiometric Parameters

Flux=6951 lm Eff.:200.43 lm/W Fe=19.67 W

Electrical parameters

V=44.91 V I=0.7722 A P=34.68 W PF=1.000 F=0.00 Hz

LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 12 ms Ip = 52928 (81%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:15
Date:2025-02-28 16:25:26
Humidity:65.0%
Remarks:
Device:HUO-223SA-048016 45V 772MA