


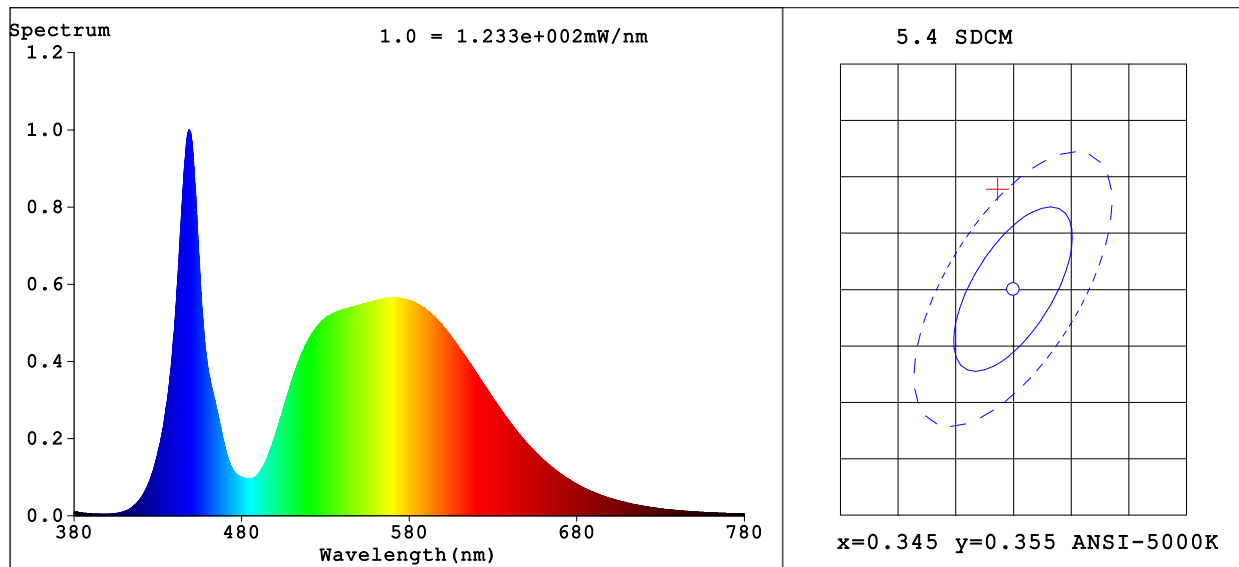

Colorimetric Parameters

Chromaticity Coordinate: x=0.3433 y=0.3642/u'=0.2055 v'=0.4904

CCT=5103K (Duv=0.0069) Dominant WL:Ld =565.8nm Purity=12.3%

Peak WL:Lp=448.6nm FWHM=16.9nm

Render Index: Ra=71.1

R1 =68 R2 =76 R3 =82 R4 =72 R5 =69 R6 =68 R7 =81

R8 =54 R9 =0 R10=43 R11=69 R12=40 R13=69 R14=90 R15=61

Photometric & Radiometric Parameters

Flux=4205 lm Eff.:209.73 lm/W Fe=12.16 W

Electrical parameters

V=44.51 V I=0.4504 A P=20.05 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_5000K

Status: Integral T = 22 ms Ip = 53211 (81%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:19
Date:2025-02-28 16:38:22
Humidity:65.0%
Remarks:
Device:HUO-223SA-048032 44.5V 450MA

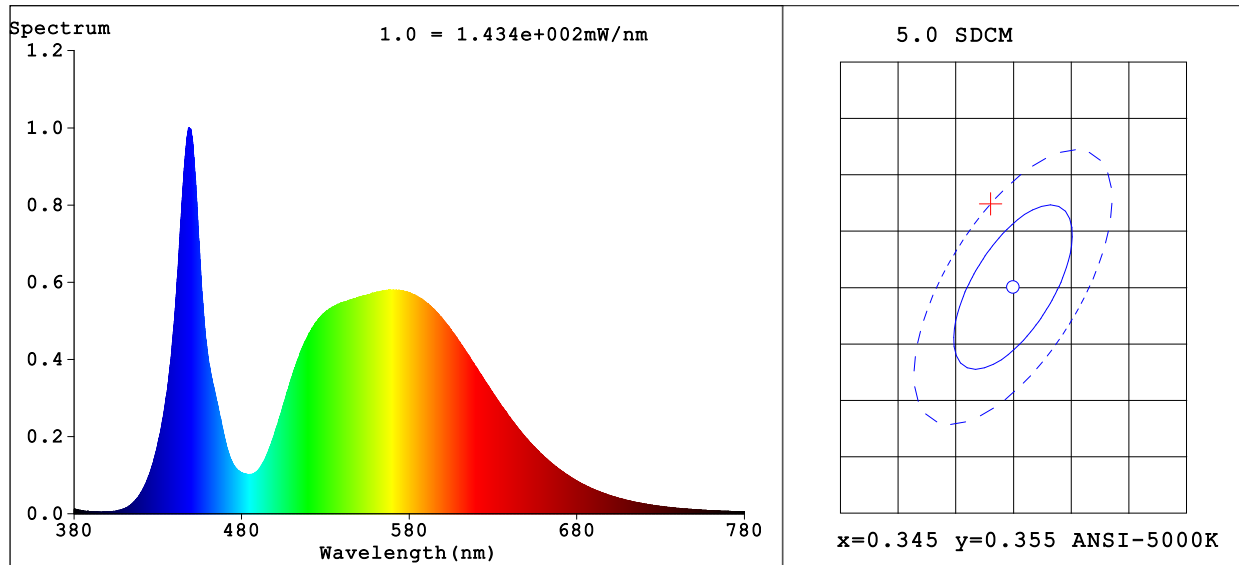

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3427$ $y=0.3627$ $u'=0.2056$ $v'=0.4896$

CCT=5122K (Duv=0.0064) Dominant WL:Ld =565.7nm Purity=11.7%

Peak WL:Lp=448.5nm FWHM=17.9nm

Render Index:Ra=71.2

R1 =68 R2 =76 R3 =82 R4 =72 R5 =69 R6 =68 R7 =81

R8 =54 R9 =0 R10=43 R11=69 R12=41 R13=69 R14=90 R15=61

Photometric & Radiometric Parameters

Flux=5016 lm Eff.:204.73 lm/W Fe=14.58 W

Electrical parameters

V=44.91 V I=0.5454 A P=24.50 W PF=1.000 F=0.00 Hz


LEVEL:OUT WHITE:ANSI_5000K

Status: Integral T = 17 ms Ip = 49098 (75%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:20
Date:2025-02-28 16:40:16
Humidity:65.0%
Remarks:
Device:HUO-223SA-048032 44.9V 545MA

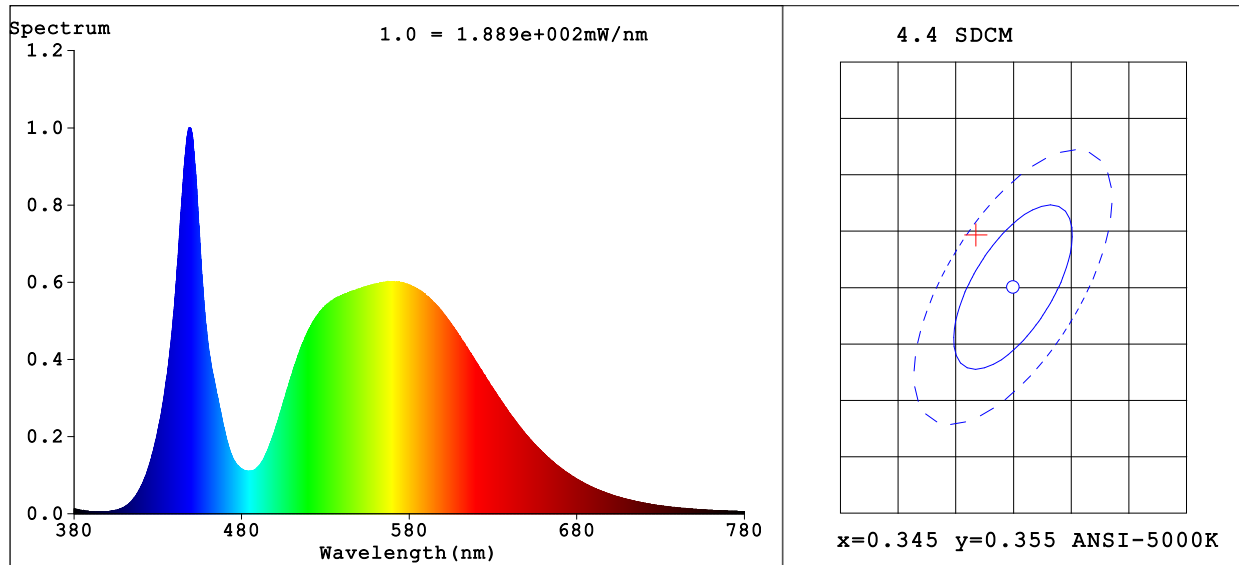

Colorimetric Parameters

Chromaticity Coordinate:x=0.3415 y=0.3599/u'=0.2058 v'=0.4881

CCT=5162K(Duv=0.0056) Dominant WL:Ld =565.3nm Purity=10.5%

Peak WL:Lp=448.9nm FWHM=19.4nm

Render Index:Ra=71.5

R1 =68 R2 =76 R3 =82 R4 =72 R5 =70 R6 =68 R7 =81

R8 =55 R9 =0 R10=43 R11=69 R12=42 R13=69 R14=90 R15=62

Photometric & Radiometric Parameters

Flux=6842 lm Eff.:190.80 lm/W Fe=20.06 W

Electrical parameters

V=45.91 V I=0.7811 A P=35.86 W PF=1.000 F=0.00 Hz

LEVEL:OUT WHITE:ANSI_5000K

Status: Integral T = 13 ms Ip = 51315 (78%)

Test Mode: Fast Test; Sensitivity = High; Tecool: ON

Model:
Test By:DAMIN
Temperature:25.3Deg
Manufacturer:HXY
Assessor:damin

Number:21
Date:2025-02-28 16:42:33
Humidity:65.0%
Remarks:
Device:HUO-223SA-048032 46V 780MA